


120V 2835 WHITE STRIP / 120LED DOUBLE ROW

FEATEURES:

- AC110V-130V plug and play; no need of a transformer
- Low power consumption and high light efficiency
- Stable configuration and uniform glow distribution
- Anti-freezing thick PVC tube cover, works normally from -13°F to 104°F
- P65 waterproof, can be used outside but not suitable to be submerged
- Excellent thermal management and heat dissipation
- Cuttable every 0.5 meters to satisfy various requirements on strip length
- No lead, cadmium, antimony or any toxic metal
- 50,000+ hour long lifespan, durable to use

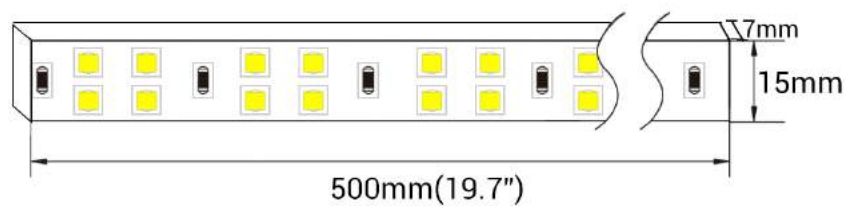

Item Code	LEDs/m	Input Voltage	Watt/ft	CCT	Lm/ft	IP Rate	Dimension	Cutting Length	Max.Run Length
HLOSS-120V-2835 -120L-3000K	120	120V	2.6	3000K	182	IP65	7*15mm	0.5m	150ft
HLOSS-120V-2835 -120L-6500K	120	120V	2.6	6500K	182	IP65	7*15mm	0.5m	150ft

OPTICAL PARAMETER

LED Type	Color Rendering Index	Beam Angle	Light Efficiency	Lumen Output	CCT Range
SMD2835	80+	120°	75.8LM/W	182LM/FT	3000K-6500K

ELECTRIC PARAMETER

Input Current/m	Input Voltage	Power/m	LEDs/m	Size of Section	LEDs of Section
0.071A	DC120V	8.5W	120	500MM(19.69")	60