


# 120V 5050 RGB Neon / 60LED

## FEATEURES:

- Multiple colors and lighting modes for choice
- AC110V-130V plug and play; no need of a transformer
- Low power consumption and high light efficiency
- Stable configuration and uniform glow distribution without dark sections and dots
- Heat-resistant and flame retardant coating
- IP65 waterproof, can be used outside but not suitable to be submerged
- Excellent thermal management and heat dissipation
- Cuttable every 0.5 meters to satisfy various requirements on strip length
- No lead, cadmium, antimony or any toxic metal
- 50,000+ hour long lifespan, durable to use

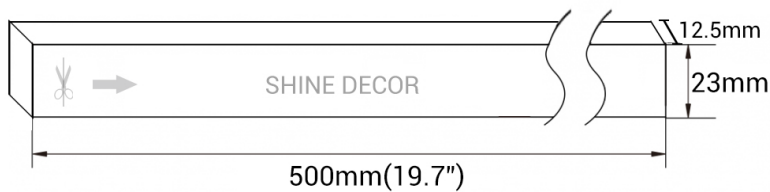

Item Code	LEDs/m	Input Voltage	Watt/ft	CCT	Lm/ft	IP Rate	Dimension	Cutting Length	Max.Run Length
HL12.5N-120V-2835-60L-RGB	60	120V	2.6	RGB	19	IP65	12.5*23mm	0.5m	150ft

## OPTICAL PARAMETER

LED Type	Color Rendering Index	Beam Angle	Light Efficiency	Lumen Output	CCT Range
SMD5050	80+	120°	7.3LM/W	19LM/FT	RGB

## ELECTRIC PARAMETER

Input Current/m	Input Voltage	Power/m	LEDs/m	Size of Section	LEDs of Section
0.071A	120V	8.5W	60	500MM(19.69")	30