


2835 TUNABLE WHITE STRIP/INDOOR/168LED

FEATEURES:

- Low power consumption and high light efficiency
- Pure and even light without glare
- CCT tunable: 2700K/4000K/6000K
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

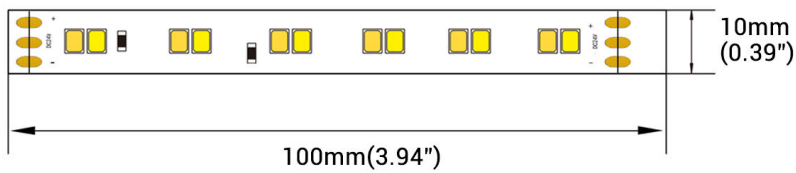

| Item Code | LEDs/m | Input Voltage | Watt/m | CCT | CRI | Lm/m | Lm/ft | Lm/w | IP Rate | PCB width |
|------------------------|--------|---------------|-------------|-------|-----|------|-------|------|---------|-----------|
| | 84 | 24V | 8.4 | 2700K | 90 | 840 | 256 | 100 | IP 20 | 10MM |
| HLIS-24V-2835-168L-CCT | 168 | 24V | 16.8 (max.) | 4000K | 90 | 1764 | 537 | 105 | IP 20 | 10MM |
| | 84 | 24V | 8.4 | 6000K | 90 | 924 | 281 | 110 | IP 20 | 10MM |

OPTICAL PARAMETER

LED Type: SMD2835
 Color Rendering Index: 90
 CCT Range: 2700K~6000K
 Beam Angle: 120°
 Light Efficiency: 100~110Lm/w
 Lumen Output/meter: 840~1764Lm/m(256~537Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.7A/m (0.2A/ft)
 Input Voltage: DC24V
 Power/M: 16.8W/m (5.1W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 100mm (3.94")
 LEDs/Meter: 168LEDs/m
 LEDs of Section: 12 LEDs

