


2835 TUNABLE WHITE STRIP/INDOOR/240LED

FEATEURES:

- Low power consumption and high light efficiency
- Pure and even light without glare
- CCT tunable: 2700K/4000K/6000K
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

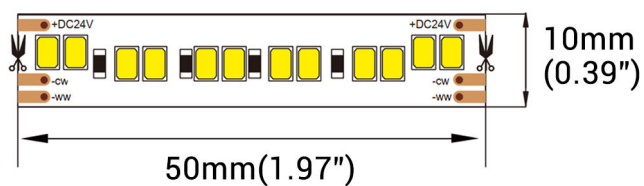

| Item Code | LEDs/m | Input Voltage | Watt/m | CCT | CRI | Lm/m | Lm/ft | Lm/w | IP Rate | PCB width |
|----------------------------|--------|---------------|--------------|-------|-----|------|-------|------|---------|-----------|
| | 120 | 24V | 12 | 2700K | 90 | 1080 | 329 | 90 | IP 20 | 10MM |
| HLIS-24V-2835 -240L-CCT | 240 | 24V | 24 (max.) | 4000K | 90 | 2280 | 695 | 95 | IP 20 | 10MM |
| | 120 | 24V | 12 | 6000K | 90 | 1200 | 1200 | 100 | IP 20 | 10MM |

OPTICAL PARAMETER

LED Type: SMD2835
 Color Rendering Index: 90
 CCT Range: 2700K~6000K
 Beam Angle: 120°
 Light Efficiency: 90~100Lm/w
 Lumen Output/meter: 1080~2280Lm/m(329~695Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 1A/m (0.3A/ft)
 Input Voltage: DC24V
 Power/M: 24W/m (7.3W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 50mm (1.97")
 LEDs/Meter: 240LEDs/m
 LEDs of Section: 12 LEDs

