


2835 WHITE STRIP/INDOOR/120LED

FEATEURES:

- Low power consumption and high light efficiency
- Vivid and pure light without glare
- DC 24V for higher safety and durability
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

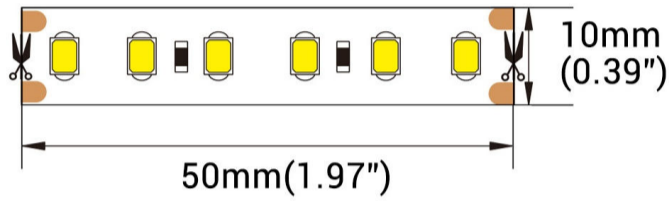

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLIS-24V-2835 -120L-2700K	120	24V	15	2700K	80	1410	429	95	IP 20	10MM
HLIS-24V-2835 -120L-3000K	120	24V	15	3000K	80	1425	434	95	IP 20	10MM
HLIS-24V-2835 -120L-4000K	120	24V	15	4000K	80	1500	457	100	IP 20	10MM
HLIS-24V-2835 -120L-5000K	120	24V	15	5000K	80	1510	460	100	IP 20	10MM
HLIS-24V-2835 -120L-6000K	120	24V	15	6000K	80	1515	461	100	IP 20	10MM

OPTICAL PARAMETER

LED Type: SMD2835
 Color Rendering Index: 80
 CCT Range: 2700K/3000K/4000K/5000K/6000K
 Beam Angle: 120°
 Light Efficiency: 95~100Lm/w
 Lumen Output/meter: 1410~1515Lm/m(429~461Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.8A/m (0.24A/ft)
 Input Voltage: DC24V Power/M: 15W/m (5.8W/ft) Static
 Electricity: 1000V (ESD)
 Size of Section: 50mm (1.97")
 LEDs/Meter: 120LEDs/m
 LEDs of Section: 6 LEDs

