


2835 WHITE STRIP/INDOOR/240LED

FEATEURES:

- Low power consumption and high light efficiency
- Vivid and pure light without glare
- DC 24V for higher safety and durability
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

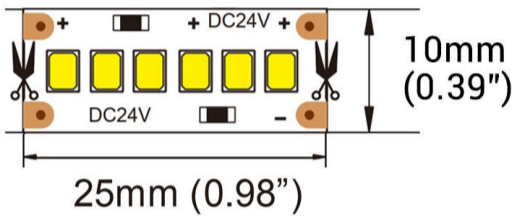

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLIS-24V-2835 -240L-2700K	240	24V	21.6	2700K	80	2160	658	100	IP 20	10MM
HLIS-24V-2835 -240L-3000K	240	24V	21.6	3000K	80	2160	658	100	IP 20	10MM
HLIS-24V-2835 -240L-4000K	240	24V	21.6	4000K	80	2268	691	105	IP 20	10MM
HLIS-24V-2835 -240L-5000K	240	24V	21.6	5000K	80	2268	691	105	IP 20	10MM
HLIS-24V-2835 -240L-6000K	240	24V	21.6	6000K	80	2268	691	105	IP 20	10MM

OPTICAL PARAMETER

LED Type: SMD2835
 Color Rendering Index: 80
 CCT Range: 2700K/3000K/4000K/5000K/6000K
 Beam Angle: 120°
 Light Efficiency: 100~105Lm/w
 Lumen Output/meter: 2160~2268Lm/m(658~691Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.9A/m (0.27A/ft)
 Input Voltage: DC24V
 Power/M: 21.6W/m (6.58W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 25mm (0.98")
 LEDs/Meter: 240LEDs/m
 LEDs of Section: 6 LEDs

