


2835 WHITE STRIP/INDOOR/60LED

FEATEURES:

- Low power consumption and high light efficiency
- Vivid and pure light without glare
- DC 24V for higher safety and durability
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

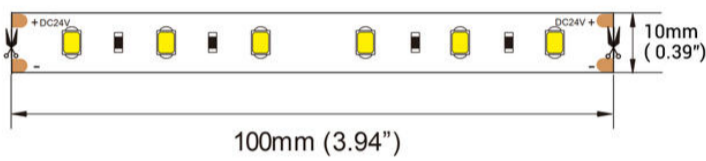

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLIS-24V-2835 -60L-2700K	60	24V	12	2700K	80	1104	336	92	IP 20	10MM
HLIS-24V-2835 -60L-3000K	60	24V	12	3000K	80	1140	347	95	IP 20	10MM
HLIS-24V-2835 -60L-4000K	60	24V	12	4000K	80	1200	365	100	IP 20	10MM
HLIS-24V-2835 -60L-5000K	60	24V	12	5000K	80	1230	375	102	IP 20	10MM
HLIS-24V-2835 -60L-6000K	60	24V	12	6000K	80	1250	381	104	IP 20	10MM

OPTICAL PARAMETER

LED Type: SMD2835
 Color Rendering Index: 80
 CCT Range: 2700K/3000K/4000K/5000K/6000K
 Beam Angle: 120°
 Light Efficiency: 92~104Lm/w
 Lumen Output/meter: 1104~1250Lm/m(336~381Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.6A/m (0.18A/ft)
 Input Voltage: DC24V
 Power/M: 12W/m (4.4W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 100mm (3.94")
 LEDs/Meter: 60LEDs/m
 LEDs of Section: 6 LEDs

