


3014 WHITE STRIP/INDOOR/300LED

FEATEURES:

- Low power consumption and high light efficiency
- Vivid and pure light without glare
- DC 24V for higher safety and durability
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

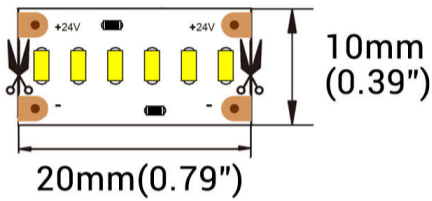

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLIS-24V-3014 -300L-2700K	300	24V	24	2700K	80	1920	585	80	IP 20	10MM
HLIS-24V-3014 -300L-3000K	300	24V	24	3000K	80	2040	621	85	IP 20	10MM
HLIS-24V-3014 -300L-4000K	300	24V	24	4000K	80	2160	658	90	IP 20	10MM
HLIS-24V-3014 -300L-5000K	300	24V	24	5000K	80	2160	658	90	IP 20	10MM
HLIS-24V-3014 -300L-6000K	300	24V	24	6000K	80	2160	658	90	IP 20	10MM

OPTICAL PARAMETER

LED Type: SMD3014
 Color Rendering Index: 80
 CCT Range: 2700K/3000K/4000K/5000K/6000K
 Beam Angle: 120°
 Light Efficiency: 80~90Lm/w
 Lumen Output/meter: 1920~2160Lm/m(585~658Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 1A/m (0.3A/ft)
 Input Voltage: DC24V
 Power/M: 24W/m (7.3W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 20mm (0.79")
 LEDs/Meter: 300LEDs/m
 LEDs of Section: 6 LEDs

