


3528 WHITE STRIP/OUTDOOR/60LED

FEATEURES:

- Low power consumption and high light efficiency
- Vivid and pure light without glare
- DC 24V for higher safety and durability
- Thick 3oz pure copper PCB for excellent thermal management
- Covered in PVC coating; IP65 waterproof for outdoor use
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

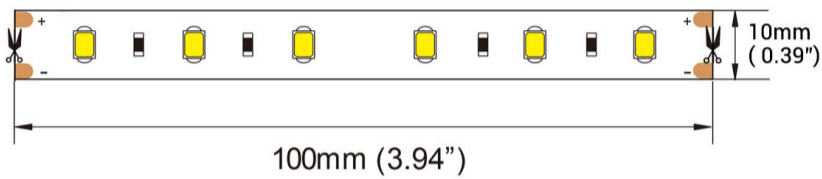

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLOS-24V-3528 -60L-2700K	60	24V	4.8	2700K	80	360	109	75	IP 65	10MM
HLOS-24V-3528 -60L-3000K	60	24V	4.8	3000K	80	384	117	80	IP 65	10MM
HLOS-24V-3528 -60L-4000K	60	24V	4.8	4000K	80	408	124	85	IP 65	10MM
HLOS-24V-3528 -60L-5000K	60	24V	4.8	5000K	80	408	124	85	IP 65	10MM
HLOS-24V-3528 -60L-6000K	60	24V	4.8	6000K	80	408	124	85	IP 65	10MM

OPTICAL PARAMETER

LED Type: SMD3528
 Color Rendering Index: 80
 CCT Range: 2700K/3000K/4000K/5000K/6000K
 Beam Angle: 120°
 Light Efficiency: 75~85Lm/w
 Lumen Output/meter: 360~408Lm/m(109~124Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.2A/m (0.29A/ft)
 Input Voltage: DC24V
 Power/M: 4.8W/m (1.46W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 100mm (3.94")
 LEDs/Meter: 60LEDs/m
 LEDs of Section: 6 LEDs

