


360°VIEW NEON FLEX / 10×10MM

FEATEURES:


- Low power consumption and high light efficiency
- Vivid and pure light without light spots
- DC 24V for higher safety and durability
- anti-yellowing and anti-UV silicone coating
- IP67 waterproof for outdoor use
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>30mm)
- 50,000+ hour long lifespan

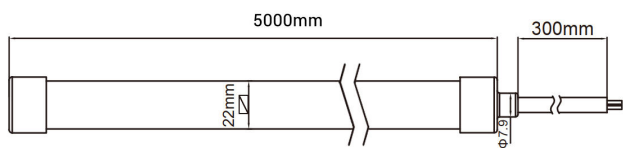

Item Code	Input Voltage	Watt/m	CCT/K	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	Cutting Length (Min.)	Max. Run Length
HLD22N-24V-2835-240L-2400K	24V	20	2100K ⁺²⁰⁰ ₋₁₀₀	>90	840	256	42	IP67	50mm	5m
HLD22N-24V-2835-240L-2700K	24V	20	2400K ⁺²⁰⁰ ₋₁₀₀	>90	945	288	47	IP67	50mm	5m
HLD22N-24V-2835-240L-3000K	24V	20	2700K ⁺²⁰⁰ ₋₁₀₀	>90	1050	320	52	IP67	50mm	5m
HLD22N-24V-2835-240L-4000K	24V	20	3000K ⁺³⁰⁰ ₋₂₀₀	>90	1155	352	57	IP67	50mm	5m
HLD22N-24V-2835-240L-5000K	24V	20	4000K ⁺³⁰⁰ ₋₂₀₀	>90	1218	384	63	IP67	50mm	5m
HLD22N-24V-2835-240L-5500K	24V	20	5000K ⁺⁴⁰⁰ ₋₃₀₀	>90	1260	384	63	IP67	50mm	5m
HLD22N-24V-4040-240L-RGB	24V	20	RGB	N/A	504	153	25	IP67	50mm	5m

OPTICAL PARAMETER

LED Type: SMD2835/SMD4040RGB
 Color Rendering Index: >90
 CCT Range: 2100K-55000K/RGB
 Beam Angle: 360°
 Light Efficiency: 42~63Lm/w
 Lumen Output/meter: 840~1260Lm/m(256~384Lm/ft)

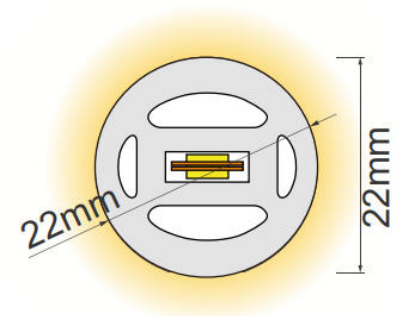

ELECTRIC PARAMETER

Input Current/m: 0.83A/m
 Input Voltage: DC24V
 Power/M: 20W/m
 Static Electricity: 1000V (ESD)
 Size of Section: 50mm
 LEDs/Meter: 240LEDs/m
 LEDs of Section: 12 LEDs

