


5050 DREAMCOLOR STRIP/OUTDOOR/60LED

FEATEURES:

- 16 million colors available; multiple dynamic lighting modes
- Vivid and pure light without glare
- Low power consumption and high light efficiency
- Thick 3oz pure copper PCB for excellent thermal management
- Covered in PVC coating; IP65 waterproof for outdoor use
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

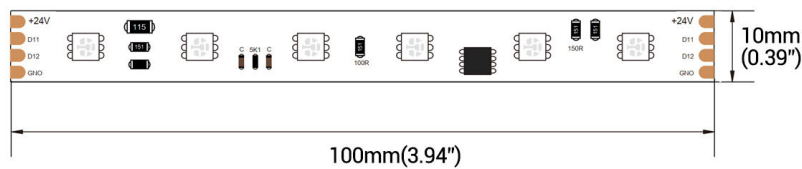

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	IC Type	IP Rate	PCB width
HLIS-24V-5050-60L-ICRGB	60	24V	14.4	RGB	N/A	WS2811	IP 65	10MM

OPTICAL PARAMETER

LED Type: SMD5050
 Color Rendering Index: N/A
 CCT Range: RGB(WS2811)
 Beam Angle: 120°
 Light Efficiency: N/A
 Lumen Output/meter: N/A

ELECTRIC PARAMETER

Input Current/m: 0.6(Max)A/m (0.18A/ft)
 Input Voltage: DC24V
 Power/M: 14.4(Max)W/m (4.4W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 100mm (3.94")
 LEDs/Meter: 60LEDs/m
 LEDs of Section: 6 LEDs

CONTROLLER

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W; 24V≤288W
Output Signal:	2.4GHz
Dimension:	107*58.5*9mm(L*w*H)
Weight:	34g
IP Rate:	IP20