


5050 RGBW STRIP/INDOOR/60LED

FEATEURES:

- 16 million colors, including white colors; Multiple modes available
- Vivid and pure light without glare
- Low power consumption and high light efficiency
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

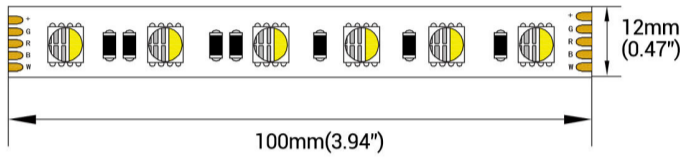

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLIS-24V-5050-60L-RGBW	60	24V	3.6	Red (620-625nm)	N/A	123	37	34	IP 20	12MM
	60	24V	3.6	Green (520-525nm)	N/A	340	103	94	IP 20	12MM
	60	24V	3.6	Blue (460-470nm)	N/A	82	25	22	IP 20	12MM
	60	24V	3.6	3000/4000/6000K	>80	370	112	102	IP 20	12MM

OPTICAL PARAMETER

LED Type: SMD5050
 Color Rendering Index: N/A
 CCT Range: RGBW
 Beam Angle: 120°
 Light Efficiency: 22~102Lm/w
 LumenOutput/meter: 82~370Lm/m(25~112Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.6A/m (0.18A/ft)
 Input Voltage: DC24V
 Power/M: 14.4W/m (4.39W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 100mm (3.94")
 LEDs/Meter: 60LEDs/m
 LEDs of Section: 6 LEDs

