
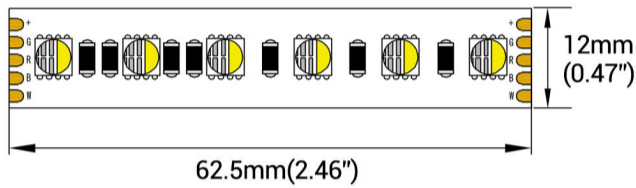


5050 RGBW STRIP/INDOOR/96LED

FEATEURES:

- 16 million colors, including white colors; Multiple modes available
- Vivid and pure light without glare
- Low power consumption and high light efficiency
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

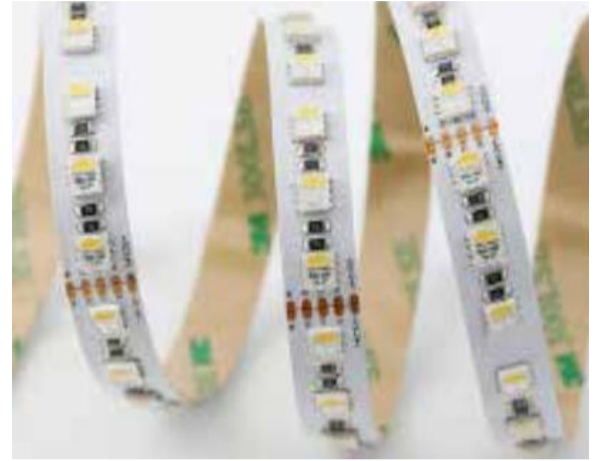

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLIS-24V-5050-96L-RGBW	96	24V	5	Red (620-625nm)	N/A	155	47	31	IP 20	12MM
	96	24V	5	Green (520-525nm)	N/A	365	111	73	IP 20	12MM
	96	24V	5	Blue (460-470nm)	N/A	95	29	19	IP 20	12MM
	96	24V	5	3000/4000/6000K	>80	425	130	85	IP 20	12MM

OPTICAL PARAMETER

LED Type: SMD5050
 Color Rendering Index: N/A
 CCT Range: RGBW
 Beam Angle: 120°
 Light Efficiency: 19~85Lm/w
 LumenOutput/meter: 95~425Lm/m(29~130Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.84A/m (0.26A/ft)
 Input Voltage: DC24V
 Power/M: 20W/m (6.1W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 62.5mm (2.5")
 LEDs/Meter: 96LEDs/m
 LEDs of Section: 6 LEDs

