


120V 2835 WHITE STRIP / 120LED SINGLE ROW

FEATEURES:

- AC110V-130V plug and play; no need of a transformer
- Low power consumption and high light efficiency
- Stable configuration and uniform glow distribution
- Covered in anti-UV PVC, IP65 waterproof, can be used outside but not suitable to be submerged
- Excellent thermal management and heat dissipation
- Cuttable every 0.5 meters to satisfy various requirements on strip length
- No lead, cadmium, antimony or any toxic metal
- 50,000+ hour long lifespan, durable to use

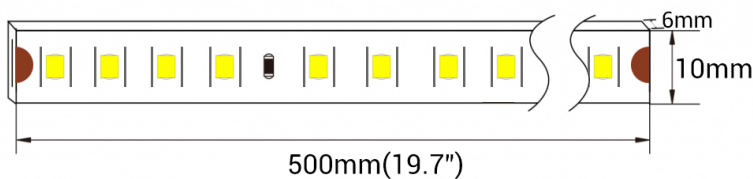

Item Code	LEDs/m	Input Voltage	Watt/ft	CCT	Lm/ft	IP Rate	Dimension	Cutting Length	Max.Run Length
HLOS-120V-2835-120L-3000K	120	120V	3000K	2	129	IP65	6*10mm	0.5m	150ft
HLOS-120V-2835-120L-4000K	120	120V	4000K	2	129	IP65	6*10mm	0.5m	150ft
HLOS-120V-2835-120L-6500K	120	120V	6500K	2	129	IP65	6*10mm	0.5m	150ft

OPTICAL PARAMETER

LED Type	Color Rendering Index	Beam Angle	Light Efficiency	Lumen Output	CCT Range
SMD2835	80+	120°	64.5LM/W	129LM/FT	3000K-6500K

ELECTRIC PARAMETER

Input Current/m	Input Voltage	Power/m	LEDs/m	Size of Section	LEDs of Section
0.044A	DC120V	5.3W	120	500MM(19.69")	60