


2835 TUNABLE WHITE STRIP/120LED

FEATEURES:

- Low power consumption and high light efficiency
- Vivid and pure light without glare
- CCT tunable: 2700K/4000K/6000K
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip (for Indoor Strips)
- Covered in PVC coating; IP65 waterproof for outdoor use(for Outdoor Strips)
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

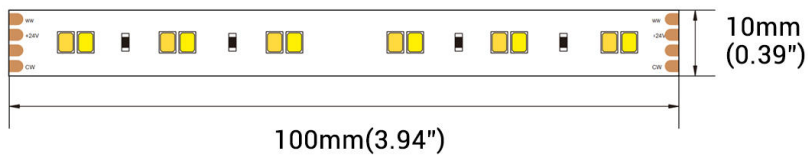

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
	60	24V	7.2	2700K	90	648	197	90	IP 20	10MM
HLIS-24V-2835-120L-CCT	120	24V	14.4 (max.)	4000K	90	1368	417	95	IP 20	10MM
	60	24V	7.2	6000K	90	720	22	100	IP 20	10MM

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
	60	24V	7.2	2700K	90	648	197	90	IP 65	10MM
HLOS-24V-2835-120L-CCT	120	24V	14.4 (max.)	4000K	90	1368	417	95	IP 65	10MM
	60	24V	7.2	6000K	90	720	22	100	IP 65	10MM

OPTICAL PARAMETER

LED Type: SMD2835
 Color Rendering Index: 90
 CCT Range: 2700K~6000K
 Beam Angle: 120°
 Light Efficiency: 90~100Lm/w
 Lumen Output/meter: 648~1368Lm/m(197~417Lm/ft)

ELECTRIC PARAMETER

Input Current/m: 0.6A/m (0.18A/ft)
 Input Voltage: DC24V
 Power/M: 14.4W/m (4.39W/ft)
 Static Electricity: 1000V (ESD)
 Size of Section: 100mm (3.94")
 LEDs/Meter: 120LEDs/m
 LEDs of Section: 12 LEDs

