


# 3528 WHITE STRIP/INDOOR/240LED

## FEATEURES:

- Low power consumption and high light efficiency
- Vivid and pure light without glare
- DC 24V for higher safety and durability
- Thick 3oz pure copper PCB for excellent thermal management
- Easy installation with 3M adhesive tape equipped on the back of the strip
- Cuttable to satisfy various requirements on strip length
- Flexible enough for different lighting projects (bend diameter:>60mm)
- 50,000+ hour long lifespan

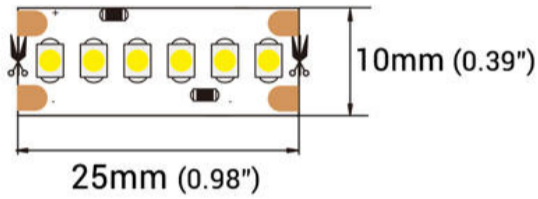

Item Code	LEDs/m	Input Voltage	Watt/m	CCT	CRI	Lm/m	Lm/ft	Lm/w	IP Rate	PCB width
HLIS-24V-3528-240L-2700K	240	24V	19.2	2700K	80	1440	439	75	IP 20	10MM
HLIS-24V-3528-240L-3000K	240	24V	19.2	3000K	80	1536	468	80	IP 20	10MM
HLIS-24V-3528-240L-4000K	240	24V	19.2	4000K	80	1632	497	85	IP 20	10MM
HLIS-24V-3528-240L-5000K	240	24V	19.2	5000K	80	1632	497	85	IP 20	10MM
HLIS-24V-3528-240L-6000K	240	24V	19.2	6000K	80	1632	497	85	IP 20	10MM

## OPTICAL PARAMETER

LED Type: SMD3528  
 Color Rendering Index: 80  
 CCT Range: 2700K/3000K/4000K/5000K/6000K  
 Beam Angle: 120°  
 Light Efficiency: 75~85Lm/w  
 Lumen Output/meter: 1440~1632Lm/m(439~497Lm/ft)

## ELECTRIC PARAMETER

Input Current/m: 0.8A/m (0.24A/ft)  
 Input Voltage: DC24V  
 Power/M: 19.2W/m (5.8W/ft)  
 Static Electricity: 1000V (ESD)  
 Size of Section: 25mm (0.98")  
 LEDs/Meter: 240LEDs/m  
 LEDs of Section: 6 LEDs

